

## [ENDURO-ECO]

### TRI-PROOF LED BATTEN

#### [Enduro-Eco]

is the most economic version of integrated linear light for indoor/outdoor car park or any public area! This version has lighter & slimmer size. It makes this luminaire highly cost effective and easy handling.


- ◆ 3 year warranty / 30,000 hours lifetime
- ◆ 20W/30W/50W Up to 100lm/W
- ◆ IP66 / IK08 / Class I



## [ENDURO-ECO]

### TRI-PROOF LED BATTEN

#### Dimensional Drawing

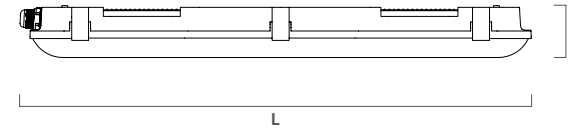

Model	20W	36W	50W
Length (L)	665	1235	1575
Width (W)	90	90	90
Height (H)	70	70	70

\*Unit = mm  
\*Length may be +/-5mm



#### Environmental Properties

Operating Temperature	-10°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Life time	30,000 hours

#### Mechanical Properties

Body	PC
Base	AC Connection
Weight	0.96kg (20W)/ 1.9kg (36W)/ 2.3kg (50W)

## Easy plug

- Lower the installation & maintenance cost


# [ENDURO-ECO]

## TRI-PROOF LED BATTEN

### Technical Operation Data

#### Eco Version

#### • POWER:20W, 4000K




Target Replacement :  
CFL T8 18W x 2

	LM-BEW20-BN0K2	LM-BED20-BN0K2
LUMINOUS FLUX	1800lm	2000lm
COLOR	Warm White	Day white
CCT	3000K	4000K
CRI	>83	>83
RADIANCE ANGLE	120°	120°
LENGTH	665mm	665mm
VOLTAGE(AC)	220-240V 50/60Hz	220-240V 50/60Hz

	LM-BEC20-BN0K2
LUMINOUS FLUX	2000lm
COLOR	Cool white
CCT	5500K
CRI	>83
RADIANCE ANGLE	120°
LENGTH	665mm
VOLTAGE(AC)	220-240V 50/60Hz

#### • POWER:36W, 4000K



Target Replacement :  
CFL T8 36W x 2

	LM-BEW36-BN0K4	LM-BED36-BN0K4
LUMINOUS FLUX	3300lm	3600lm
COLOR	Warm White	Day white
CCT	3000K	4000K
CRI	>83	>83
RADIANCE ANGLE	120°	120°
LENGTH	1235mm	1235mm
VOLTAGE(AC)	220-240V 50/60Hz	220-240V 50/60Hz

	LM-BEC36-BN0K4
LUMINOUS FLUX	3600lm
COLOR	Cool white
CCT	5500K
CRI	>83
RADIANCE ANGLE	120°
LENGTH	1235mm
VOLTAGE(AC)	220-240V 50/60Hz

# [ENDURO-ECO]


## TRI-PROOF LED BATTEN

	LM-BEW50-BN0K5	LM-BED50-BN0K5
LUMINOUS FLUX	4600lm	5000lm
COLOR	Warm White	Day white
CCT	3000K	4000K
CRI	>83	>83
RADIANCE ANGLE	120°	120°
LENGTH	1575mm	1575mm
VOLTAGE(AC)	220-240V 50/60Hz	220-240V 50/60Hz

	LM-BEC50-BN0K5
LUMINOUS FLUX	5000lm
COLOR	Cool white
CCT	5500K
CRI	>83
RADIANCE ANGLE	120°
LENGTH	1575mm
VOLTAGE(AC)	220-240V 50/60Hz

Remark:  
Please contact us for other specification information.

#### • POWER:50W, 4000K



Target Replacement :  
CFL T8 58W x 2



客服中心  
Customer Service Center