



## [PISO]

### LED Panel


#### [Piso]

is an integrated lighting indoor public area! It's a perfect replacement of T8 battens. such as office and supermarket, creating a harmonic working environment by evenly distributed light.

◆ 5 year warranty / 50,000 hours lifetime  
(Driver option: **LUMAN** / **TRIDONIC** / **PHILIPS** / **MEAN WELL** or specified )

(LED option: **LUMAN** / **EPISTAR** / **SEOUL** / **LG** or equivalent )

◆ High efficiency with up to 110lm/W

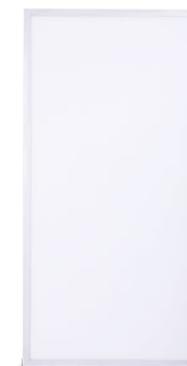


#### Flex and Plug Connector

Easy installation between PISO & driver  
Screw cap fastens and combines the two cables



# [PISO]


## LED Panel

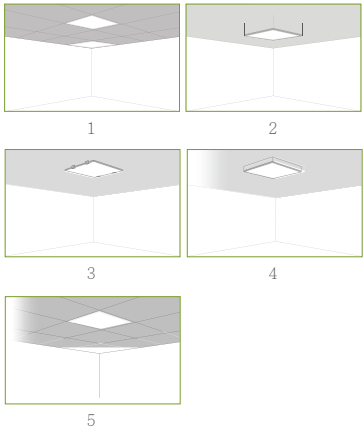

### Installation Options

1. Recess directly to ceiling frame.
2. By pendent wires
3. Surface mounted By L-Bracket
4. Surface mounted by Ceiling metal box
5. Recess mounted by springs

### Dimensional Drawing

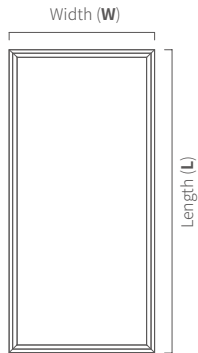

Model	60cm x 60cm	30cm x 120cm	60cm x 120cm
L	595	1195	1195
W	595	295	595
H	10	10	10

\*Unit = mm  
\*Cut Hole size can be +/- 5mm



### Environmental Properties

Operating Temperature	-10°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Life time	50,000 hours

### Mechanical Properties

Body	Aluminum
Base	Flex and Plug
Weight	3.5kg (60 x 60cm) / 3.6kg (30 x 120cm) / 7.8kg (60 x 120cm)

# [PISO]

## LED Panel

### Technical Operation Data

#### ECO Version


	LM-TPW40-AN0W2	LM-TPD40-AN0W2
LUMINOUS FLUX	3000lm	3200lm
COLOR	Warm White	Day white
CCT	3000K	4000K
CRI	>83	>83
DIMENSIONS (L x W x H)	595 x 595 x 10mm	595 x 595 x 10mm
VOLTAGE(AC)	220-240V 50/60Hz	220-240V 50/60Hz

	LM-TPC40-AN0W2
LUMINOUS FLUX	3200lm
COLOR	Cool white
CCT	5500K
CRI	>83
DIMENSIONS (L x W x H)	595 x 595 x 10mm
VOLTAGE(AC)	220-240V 50/60Hz


	LM-TPW40-AN0W3	LM-TPD40-AN0W3
LUMINOUS FLUX	3200lm	3200lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>83	>83
DIMENSIONS (L x W x H)	295 x 1195 x 10mm	295 x 1195 x 10mm
VOLTAGE(AC)	220-240V 50/60Hz	220-240V 50/60Hz

	LM-TPC40-AN0W3
LUMINOUS FLUX	3200lm
COLOR	Cool white
CCT	5500K
CRI	>83
DIMENSIONS (L x W x H)	295 x 1195 x 10mm
VOLTAGE(AC)	220-240V 50/60Hz

#### • POWER:40W, 4000K




#### • POWER:40W, 4000K



# [PISO]

## LED Panel

### • POWER:55W, 4000K




	LM-TPW55-AN0W4	LM-TPD55-AN0W4
<b>LUMINOUS FLUX</b>	3800lm	4000lm
<b>COLOR</b>	Warm white	Day white
<b>CCT</b>	3000K	4000K
<b>CRI</b>	>83	>83
<b>DIMENSIONS (L x W x H)</b>	595 x 1195 x 10mm	595 x 1195 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz	220-240V 50/60Hz

	LM-TPC55-AN0W4
<b>LUMINOUS FLUX</b>	4000lm
<b>COLOR</b>	Cool white
<b>CCT</b>	5500K
<b>CRI</b>	>83
<b>DIMENSIONS (L x W x H)</b>	595 x 1195 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz

### High Bright Version

### • POWER:40W, 4000K



	LM-TPW40-BN0W2	LM-TPD40-BN0W2
<b>LUMINOUS FLUX</b>	3800lm	4000lm
<b>COLOR</b>	Warm White	Day white
<b>CCT</b>	3000K	4000K
<b>CRI</b>	>83	>83
<b>DIMENSIONS (L x W x H)</b>	595 x 595 x 10mm	595 x 595 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz	220-240V 50/60Hz

	LM-TPC40-BN0W2
<b>LUMINOUS FLUX</b>	4000lm
<b>COLOR</b>	Cool white
<b>CCT</b>	5500K
<b>CRI</b>	>83
<b>DIMENSIONS (L x W x H)</b>	595 x 595 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz


# [PISO]

## LED Panel

	LM-TPW40-BN0W3	LM-TPD40-BN0W3
<b>LUMINOUS FLUX</b>	3800lm	4000lm
<b>COLOR</b>	Warm white	Day white
<b>CCT</b>	3000K	4000K
<b>CRI</b>	>83	>83
<b>DIMENSIONS (L x W x H)</b>	295 x 1195 x 10mm	295 x 1195 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz	220-240V 50/60Hz

	LM-TPC40-BN0W3
<b>LUMINOUS FLUX</b>	4000lm
<b>COLOR</b>	Cool white
<b>CCT</b>	5500K
<b>CRI</b>	>83
<b>DIMENSIONS (L x W x H)</b>	295 x 1195 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz


### • POWER:40W, 4000K



	LM-TPW55-BN0W4	LM-TPD55-BN0W4
<b>LUMINOUS FLUX</b>	5200lm	5500lm
<b>COLOR</b>	Warm white	Day white
<b>CCT</b>	3000K	4000K
<b>CRI</b>	>83	>83
<b>DIMENSIONS (L x W x H)</b>	595 x 1195 x 10mm	595 x 1195 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz	220-240V 50/60Hz

	LM-TPC55-BN0W4
<b>LUMINOUS FLUX</b>	5500lm
<b>COLOR</b>	Cool white
<b>CCT</b>	5500K
<b>CRI</b>	>83
<b>DIMENSIONS (L x W x H)</b>	595 x 1195 x 10mm
<b>VOLTAGE(AC)</b>	220-240V 50/60Hz

### • POWER:55W, 4000K



Remark:  
Please contact us for other specification information.



EDEKA Supermarket , Germany



RTA office, Dubai, UAE