



### We guarantee because we know!

The main concern for industrial lighting series are always Durability (at least 5-7 years warranty) and Reliability (minimum lumen depreciation). We always put more LED modules than you can imagine to underdrive the fixture, so we could 100% guarantee the desired concern!


## [SLIM] LED Flood Light

[SLIM] is a new generation flood light for outdoor billboards or act as buildings wall washer, super thin and slender body, save up to 70% energy!


- ◆ Tailormade power options from 70W - 200W efficiency up to 120lm/W
  - ◆ 5 year warranty / 50,000 hours lifetime  
(Driver option: **LUMAN** / **MEAN WELL** or specified)  
(LED option: **NICHIA** / **PHILIPS** or equivalent)
- (Please contact us for further specifications / tailor-made options)



1/3 of the old size  
Great Savez in delivery!

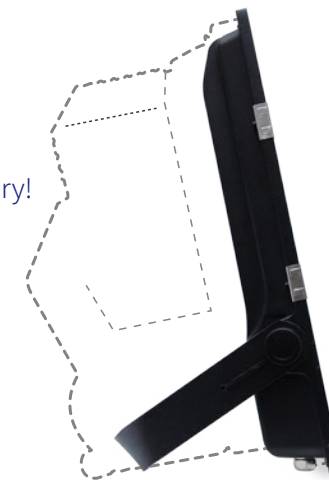

# [SLIM] LED Flood Light

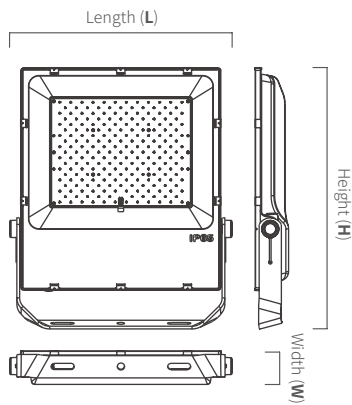

## Dimensional Drawing

Power	70W	100W	150W	200W
L	245	295	330	360
W	50	54	54	54
H	355	402	430	470

\*Unit = mm  
\*Cut Hole size can be +/- 5mm



## Environmental Properties

Operating Temperature	-10°C ~ +40°C
Storage Temperature	-40°C ~ +60°C
Life time	50,000 hours

## Mechanical Properties

Body	Aluminum
Base	AC Connection
Weight	2.3kg(70W) / 3.1kg(100W) / 4.0kg(150W) / 4.8kg(200W)



# [SLIM] LED Flood Light

## Technical Operation Data


	LM-FLW70-BN0D	LM-FLD70-BN0D
LUMINOUS FLUX	9600lm	9600lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>70	>70
VOLTAGE(AC)	90-265V 50/60Hz	90-265V 50/60Hz

	LM-FLC70-BN0D
LUMINOUS FLUX	9600lm
COLOR	Cool white
CCT	5700K
CRI	>70
VOLTAGE(AC)	90-265V 50/60Hz


	LM-FLW100-BN0D	LM-FLD100-BN0D
LUMINOUS FLUX	12000lm	12000lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>70	>70
VOLTAGE(AC)	90-265V 50/60Hz	90-265V 50/60Hz

	LM-FLC100-BN0D
LUMINOUS FLUX	12000lm
COLOR	Cool white
CCT	5700K
CRI	>70
VOLTAGE(AC)	90-265V 50/60Hz

### • POWER:70W, 4000K




### • POWER:100W, 4000K



# [SLIM] LED Flood Light


## • POWER:150W, 4000K



	LM-FLW150-BN0D	LM-FLD150-BN0D
<b>LUMINOUS FLUX</b>	18000lm	18000lm
<b>COLOR</b>	Warm white	Day white
<b>CCT</b>	3000K	4000K
<b>CRI</b>	>70	>70
<b>VOLTAGE(AC)</b>	90-265V 50/60Hz	90-265V 50/60Hz

	LM-FLC150-BN0D
<b>LUMINOUS FLUX</b>	18000lm
<b>COLOR</b>	Cool white
<b>CCT</b>	5700K
<b>CRI</b>	>70
<b>VOLTAGE(AC)</b>	90-265V 50/60Hz

## • POWER:200W, 4000K



	LM-FLW200-BN0D	LM-FLD200-BN0D
<b>LUMINOUS FLUX</b>	24000lm	24000lm
<b>COLOR</b>	Warm white	Day white
<b>CCT</b>	3000K	4000K
<b>CRI</b>	>70	>70
<b>VOLTAGE(AC)</b>	90-265V 50/60Hz	90-265V 50/60Hz

	LM-FLC200-BN0D
<b>LUMINOUS FLUX</b>	24000lm
<b>COLOR</b>	Cool white
<b>CCT</b>	5700K
<b>CRI</b>	>70
<b>VOLTAGE(AC)</b>	90-265V 50/60Hz

Remarks:  
Please contact us for more specification information.

