



[SPLASH]

LED Linear Wall Washer

[Splash]

Provide powerful illumination and fancy effects for building façade and landscape, reduce CO₂ emission while providing brilliant night light.



- ◆ Excellent optical design
- ◆ Easy - to - install mounting bracket with adjustable 0 to 90° mounting angle
- ◆ 5 year warranty / 50,000 hours lifetime
(Driver option: **TRIDONIC** / **PHILIPS** / **MEAN WELL** or specified)
(LED option: **CREE** / **NICHIA** / **LG** / **SEOUL** or equivalent)
- ◆ High efficiency up to **50W**, **100lm/W**, super high brightness and effectiveness



(Please contact us for further specifications / tailor-made options)



APPLICATIONS



- ◆ Building façade wall washing
- ◆ Landscape lighting
- ◆ General outdoor area illumination
- ◆ Shop Front lighting



[SPLASH]

LED Linear Wall Washer

Dimensional Drawing

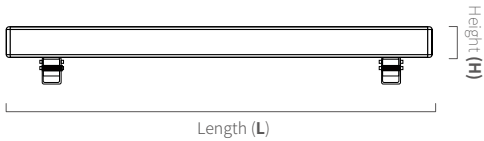

Size	1ft	2ft	3ft	4ft
L	300	600	900	1200
W	55	55	55	55
H	55	55	55	55
TH	100	100	100	100

*Unit = mm
*Length may be +/-5mm



Environmental Properties

Operating Temperature	-20°C ~ +40°C
Storage Temperature	-40°C ~ +75°C
Life time	50,000 hours

Mechanical Properties

Body	Aluminum
Base	AC Connection
Weight	1.1kg(1ft)/1.8kg(2ft)/2.4kg(3ft)/3.0kg(4ft)

[SPLASH]

LED Linear Wall Washer

Technical Operation Data


	LM-WS-14W-Szz	LM-WS-14D-Szz
LUMINOUS FLUX	1300lm	1400lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>70	>70
RADIANCE ANGLE	12° /24° /50° /85°	12° /24° /50° /85°
LENGTH	1ft/30cm	1ft/30cm
VOLTAGE(DC)	36V DC	36V DC

	LM-WS-14C-Szz
LUMINOUS FLUX	1400lm
COLOR	Cool white
CCT	5700K
CRI	>70
RADIANCE ANGLE	12° /24° /50° /85°
LENGTH	1ft/30cm
VOLTAGE(DC)	36V DC


	LM-WS-27W-Szz	LM-WS-27D-Szz
LUMINOUS FLUX	2500lm	2700lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>70	>70
RADIANCE ANGLE	12° /24° /50° /85°	12° /24° /50° /85°
LENGTH	2ft/60cm	2ft/60cm
VOLTAGE(DC)	36V DC	36V DC

	LM-WS-27C-Szz
LUMINOUS FLUX	2700lm
COLOR	Cool white
CCT	5700K
CRI	>70
RADIANCE ANGLE	12° /24° /50° /85°
LENGTH	2ft/60cm
VOLTAGE(DC)	36V DC

• POWER:14W, 4000K

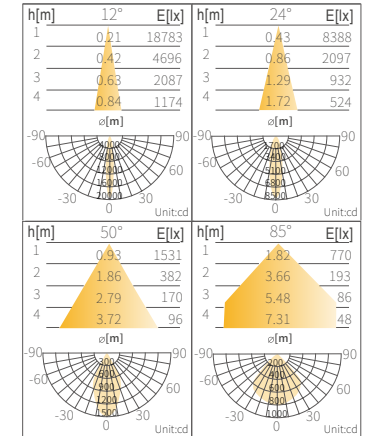

• POWER:27W, 4000K

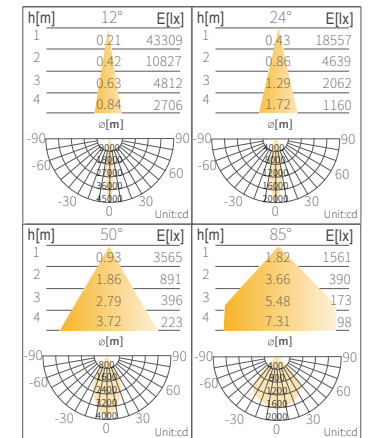


[SPLASH]

LED Linear Wall Washer

Technical Operation Data

• POWER:40W, 4000K

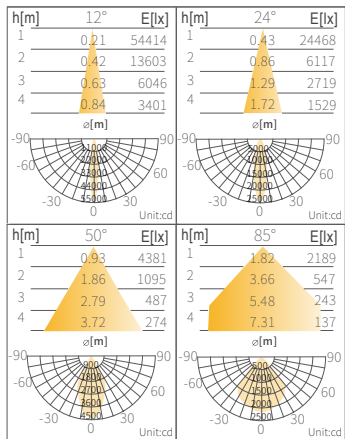

LM-WS-40W-Szz


LM-WS-40D-Szz

LUMINOUS FLUX	3700lm	4000lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>70	>70
RADIANCE ANGLE	12° /24° /50° /85°	12° /24° /50° /85°
LENGTH	3ft/90cm	3ft/90cm
VOLTAGE(DC)	36V DC	36V DC

LM-WS-40C-Szz

LUMINOUS FLUX	4000lm
COLOR	Cool white
CCT	5700K
CRI	>70
RADIANCE ANGLE	12° /24° /50° /85°
LENGTH	3ft/90cm
VOLTAGE(DC)	36V DC

• POWER:54W, 4000K

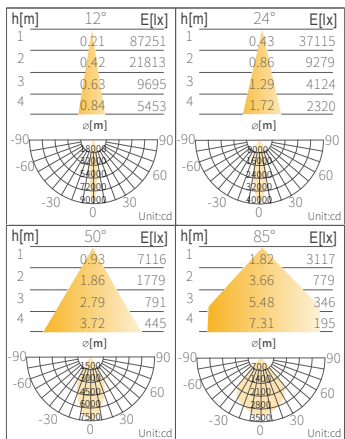

LM-WS-54W-Szz

LM-WS-54D-Szz

LUMINOUS FLUX	5000lm	5400lm
COLOR	Warm white	Day white
CCT	3000K	4000K
CRI	>70	>70
RADIANCE ANGLE	12° /24° /50° /85°	12° /24° /50° /85°
LENGTH	4ft/120cm	4ft/120cm
VOLTAGE(DC)	36V DC	36V DC

LM-WS-54C-Szz

LUMINOUS FLUX	5400lm
COLOR	Cool white
CCT	5700K
CRI	>70
RADIANCE ANGLE	12° /24° /50° /85°
LENGTH	4ft/120cm
VOLTAGE(DC)	36V DC

Remark:

'zz' (beam angle)= '12' (12°) / '24' (24°) / '50' (50°) / '85' (85°)

Please contact us for other specification information.

