



WE HELP YOU WITH PROFESSIONAL

Formed in 2008, marketing leading LED solution with end-to-end capabilities. Your reliable LED products partner for any projects with superior and reliable quality up to 10 years warranty.



Follow us and discover more





WHO WE ARE ?

Internationally-renowned lighting solutions provider and manufacturer

TLG is an Australian based lighting group founded on the principles of quality, innovation and a strong customer focus. Vertically integrated from product development and design to manufacturing and distribution, with projects in over 40 countries across Asia Pacific, Europe, North America and the Middle East.

LUMAN + **TEKNIK** = **TLG**
> illuminating the greens LIGHTING SOLUTIONS | TEKNIK LUMAN GROUP




WHY CHOOSE US ? WE SPECIALIZE IN

- ✓ R & D | Manufacturing
- ✓ Excellent Quality Management
- ✓ Global Knowledge and Experience
- ✓ Professional Marketing Team With Effective Brand Support

FLEXTEK LITE

Flexible Rope Light With Key Features

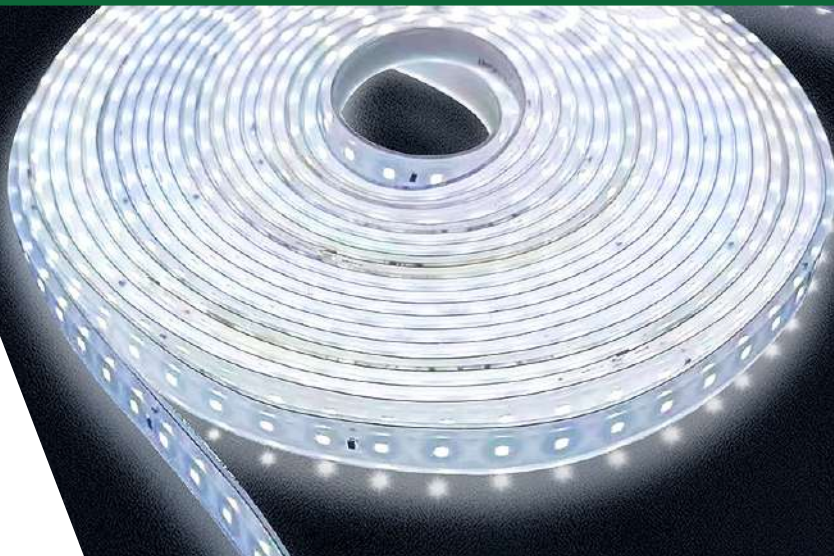

MAX
2200
LUMEN/
PER METER

LOW
FLICKERING

PROFESSIONAL
IC
CONTROLLED

50°C
Max. Ta

3
YEAR
PRODUCT
WARRANTY

IP
67
INGRESS
PROTECTION

IK
10
IMPACT
PROTECTION




INDUSTRIAL GRADE ROPE LIGHT


The FlexTEK Lite is a new approach to industrial tunnel and construction site lighting. Its extended run lengths allow for significantly reduced installation costs. Durable, non-toxic and flexible silicone construction with up to 3 years guaranteed quality by AC operated.

The FlexTEK Lite offers a combination of high efficiency LED chips and cutting edge power stabilisation providing its extended run length and market leading output.

SAFE AND RELIABLE

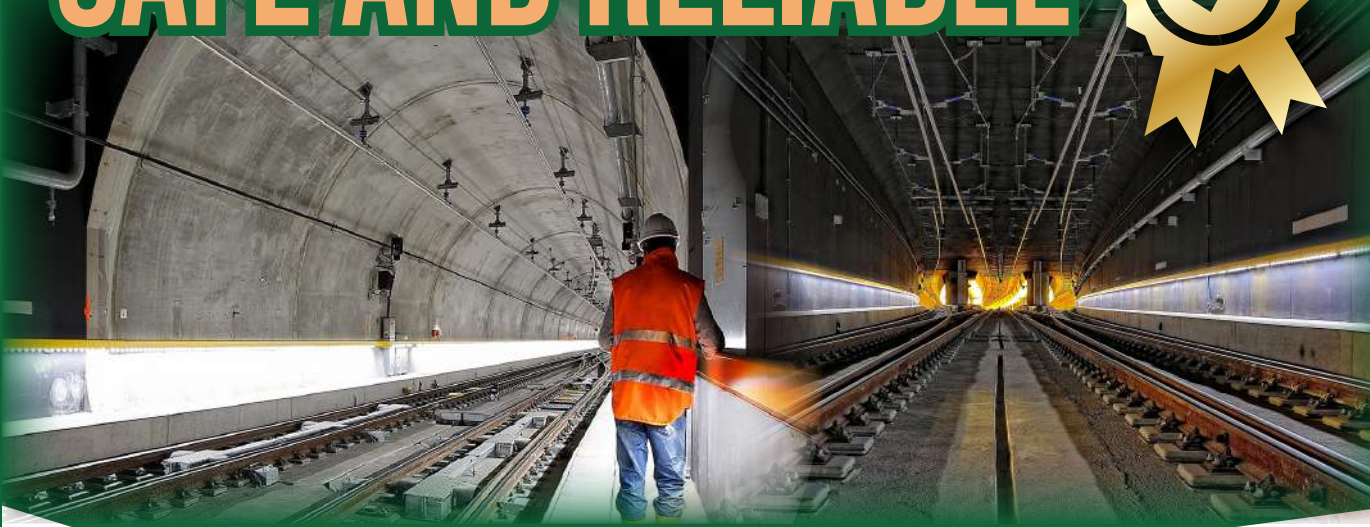


FLEXTEK LITE

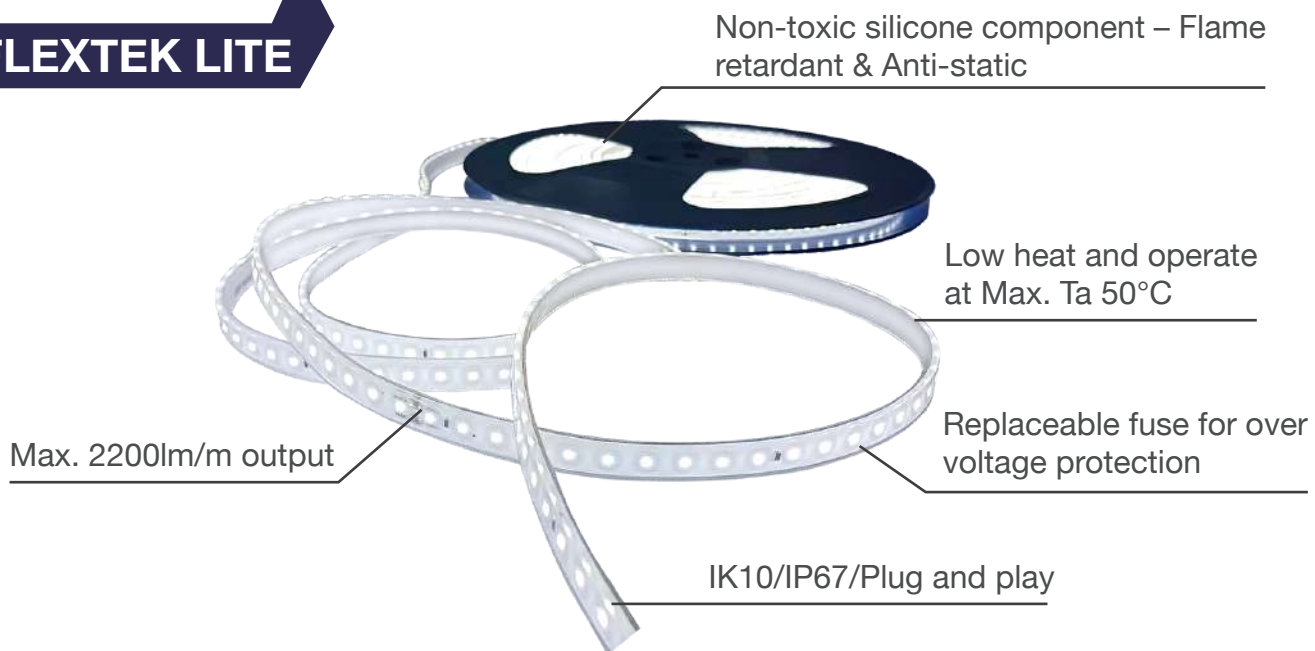

INDUSTRIAL GRADE ROPE LIGHT



DIMENSIONAL DRAWING

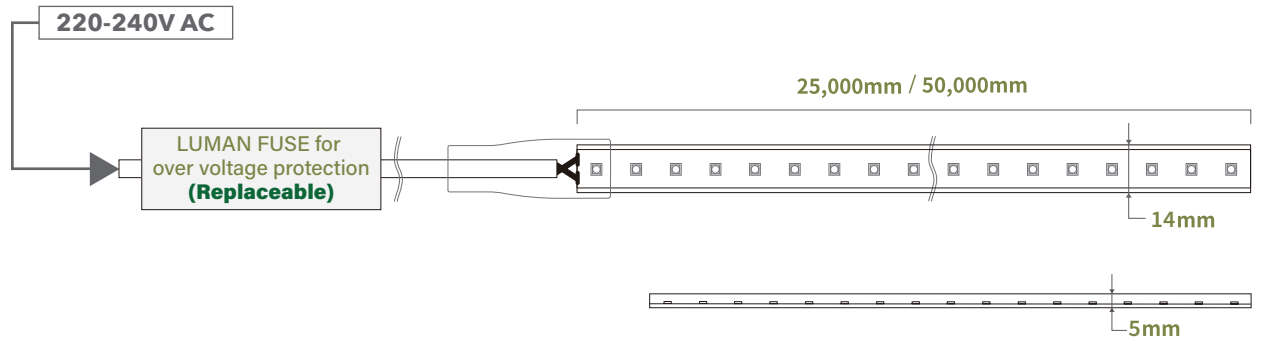

TECHNICAL SPECIFICATIONS

Model	FL-9D-230	FL-12D-230	FL-12D-230-L	FL-14D-230	FL-14D-230-L
Power :	9w/m	14w/m	14w/m	14w/m	14w/m
Lumens Output :	1300lm/m	1800lm/m	1800lm/m	2200lm/m	2200lm/m
Max. Length * :	50m	25m	50m	25m	50m
CCT ** :	5700K				
CRI :	80				
Rate Life :	35,000 hours				
Body :	Silicone				
Installation :	Surface mount				
Beam Angle :	120°				
SDCM :	<5				
Operating Temperature :	-40°C to 50°C				
Input Voltage :	220-240V AC				
IP Rating :	IP67				
IK Rating :	IK10				
Net Weight :	2.3kg (25m) / 4.6kg (50m)				



Customization Services

*Max. Length can be customized up to 100m-500m

**CCT can be customized by 3000K/4000K/Amber/
Green/Red, etc

Welcome
inquiries!

